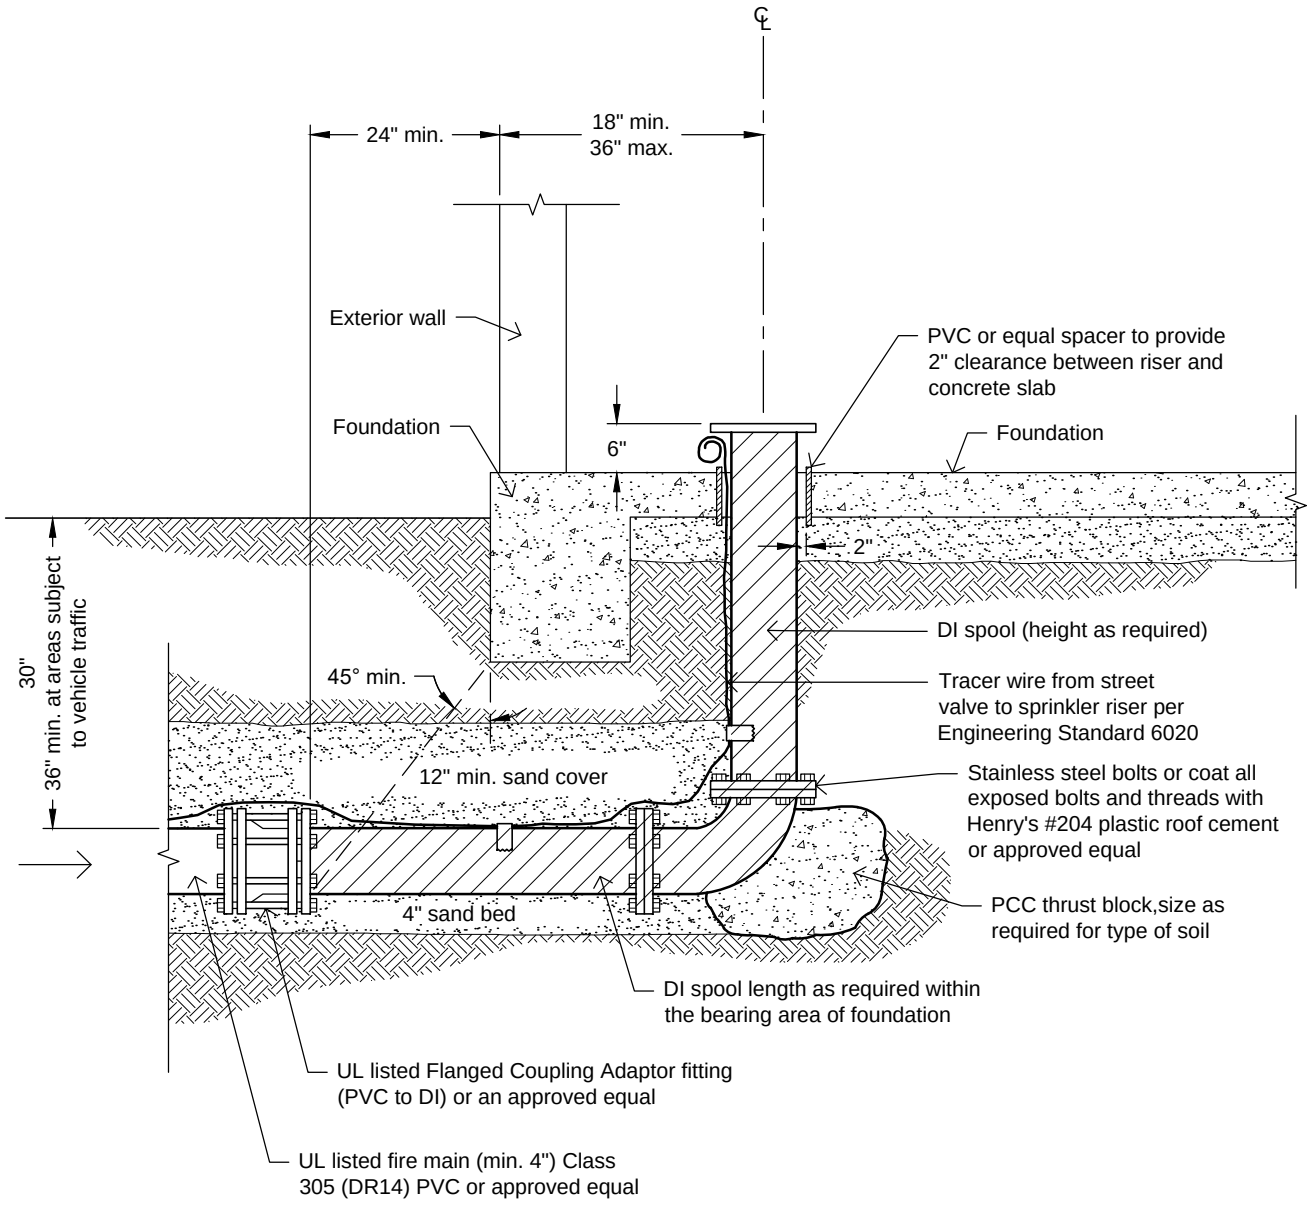

GENERAL NOTES:

A. Fire line shall be tested in accordance with Section 76, "WATERLINES" of the University Standard Specifications. NO CONNECTION MAY BE MADE UNTIL WATER SAMPLES HAVE BEEN TESTED AND APPROVED.

B. Location of fire sprinkler riser shall be approved by the Fire Department.

C. Materials shall be UL listed for fire service.

D. Wrap bolts with 6 mil plastic sheathing prior to placement of thrust block(s).

E. All fittings and risers shall be ductile iron, internally cement lined for fire service, and wrapped with two layers of UPC listed plastic tape (minimum 40 mil) or coated with Henry's #204 plastic roof cement or an approved equal.

SCALE: N.T.S.

STANDARD CURRENT AS OF:	01/21/2020
APPROVED BY:	XX
NOTES:	

CAL POLY

FIRE MAIN BUILDING CONNECTION

6590