

Cal Poly - Environmental Health and Safety

Standardized Fall Protection Harness and Lanyard Recommendations
Stocked in Facilities Warehouse

The following equipment recommendations are based on the most flexible, in terms of use options, simplest to use, and simplest to maintain.

Harnesses: *

DBI/SALA, Delta, Construction Vest Style Harness with Belt/Hip Pad and Tongue Buckles

Small, Model 1102201

Medium, Model 1101654

Large, Model 1101655

X Large, Model 1101655

2X Large, Model 1102205


3X Large, Model 1101660



Size Chart:

DELTA™ HARNESSES ARE AVAILABLE IN UNIVERSAL SIZES

No matter if your Delta™ is XS or 3XL, it adds to your tool carrying capabilities and your job-site flexibility.

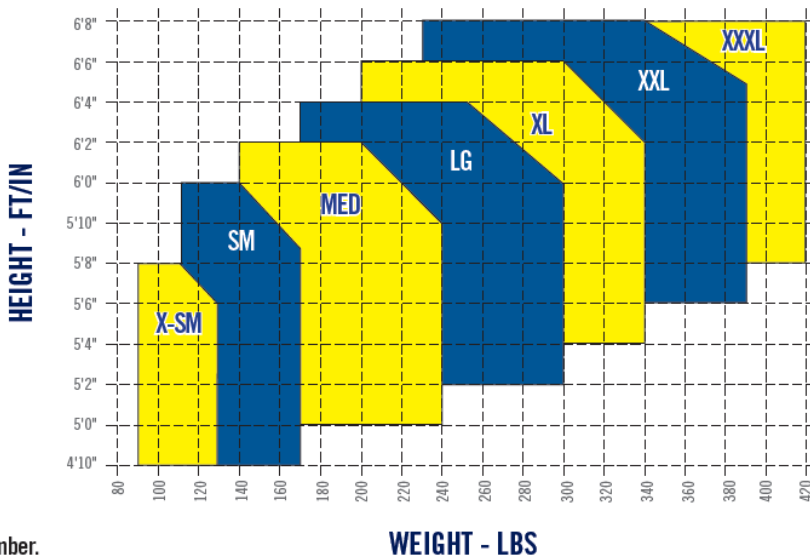

Suspension Trauma Straps



number.

* NOTE: All harnesses require a set of Suspension Trauma Straps.
Recommended: DBI/SALA Suspension Trauma Straps, Model 9501403

Cal Poly - Environmental Health and Safety

Standardized Fall Protection Harness and Lanyard Recommendations
Stocked in Facilities Warehouse

Positioning Lanyards:

Positioning lanyards are to be used as part of fall protection systems designed so that an employee can not freefall more than 2 feet.

DBI/SALA, Web Positioning Lanyard-

2 Foot, Model 1231102

3 Foot, Model 1231103

4 Foot, Model 1231104



Shock Absorbing Lanyards:

Shock absorbing lanyards are designed to limit the fall arresting force to 1800 pounds when used with a full body harness.

DBI/SALA, Force 2 Shock Absorbing Lanyard-

Shock Absorber Only with Snap Hook and D ring, Model 1246130

4 Foot Single Leg Lanyard with Shock Absorber, Model 1246166

6 Foot Single Leg Lanyard with Shock Absorber, Model 1246167

